
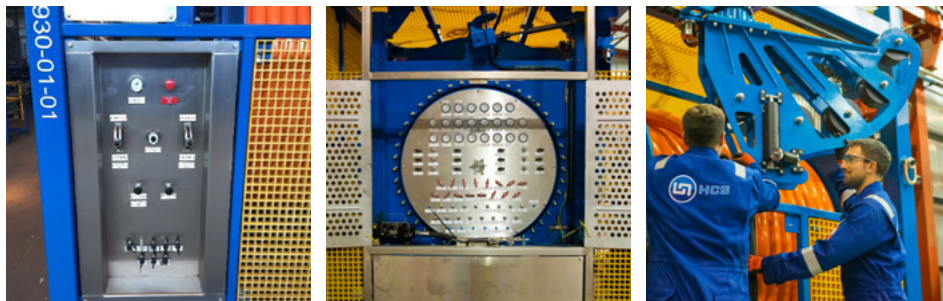


Overview

The HCS rental umbilical reel is suitable for carrying 250m of 90mm umbilical. The reel has a side-mounted gauge panel that accommodates 22 hydraulic functions which can be isolated at any time during operation.

The reel has a front-mounted sheave that protects the umbilical MBR from being compromised during deployment and recovery. The reel comes with a remote station for the deployment and recovery to allow the operator to be closer to the line of site during operation.

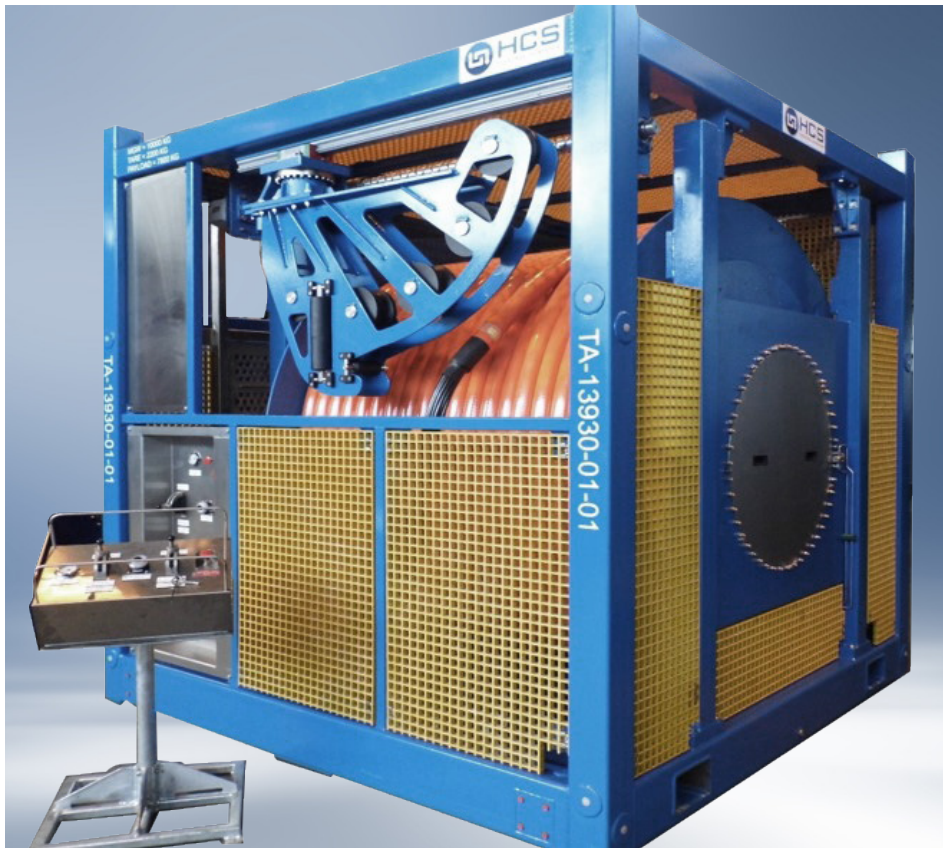

Weight & Dimensions

Maximum Gross Weight:
10,000 kg

Dimensions:
3115mm x 2870mm x 2820mm

Specifications

Air Supply Unit:
6-10 bar (87-145psi)

Line Pull (Hoist/Lower):
850 kg

Hoist/Lower Speed:
3.94 RPM

Maximum Umbilical Length:
450m

Certificate of Compliance

Full DNV Certification to 2.7-1

Hazardous Area:
ATEX Zone 2,
Gas Group IIB Temp T4



Aberdeen

T: +44(0)1224 044 100

E: aberdeen@hcsl.com

